

arneg

www.arneg.it

Venezia 2



YOUR NATURALLY INNOVATIVE PARTNER FOR RETAIL SOLUTIONS


into the World

Venezia 2	Lunghezza senza spalle Length without ends Länge ohne Seiten Longeur sans joues Longitud sin laterales Длина без боковин	Modello Model Modell Modele Modelo Модель			Temperatura di esercizio Working temperature Betriebstemperatur Temp. de fonctionnement Temperatura de trabajo Рабочая температура	Superficie di esposizione orizzontale Horizontal display surface Gesamte Ausstellfläche Surface d'exposition horizontale Superficie de exposición de apoyo Горизонтальная площадь экспозиции	Volume netto Net volume Nutzleistung Capacité utile Capacidad útil Полезный объем		
		REMOTO REMOTE		+ UCE WITH UNIT			vetrina display surface	cella storage	
		carenato closed	con zamponi on feet	carenato closed					
		mm						°C	m ²
VCA con riserva with storage	1250	•	•	•	0°C / +2°C +2°C / +4°C	1,1	143	131	
	1875	•	•	•		1,6	214	197	
	2500	•	•	•		2,2	286	263	
	3750	•	•	•		3,3	428	394	
VCB con riserva with storage	1250	•	•	•		1,1	143	131	
	1875	•	•	•		1,6	214	197	
	2500	•	•	•		2,2	286	263	
	3750	•	•	•		3,3	428	394	
SELF con riserva with storage	1250	•	•	•		1,1	143	131	
	1875	•	•	•		1,6	214	197	
	2500	•	•	•		2,2	286	263	
	3750	•	•	•		3,3	428	394	
VCA MAXI	1250	•	•	•		1,1	283		
	1875	•	•	•		1,6	425		
	2500	•	•	•		2,2	567		
	3750	•	•	•		3,3	850		
VCB MAXI	1250	•	•	•	1,1	283			
	1875	•	•	•	1,6	425			
	2500	•	•	•	2,2	567			
	3750	•	•	•	3,3	850			
SELF MAXI	1250	•	•	•	1,1	283			
	1875	•	•	•	1,6	425			
	2500	•	•	•	2,2	567			
	3750	•	•	•	3,3	850			
VCA FISH	937	•	•	•	+2°C / +4°C	0,7	60		
	1250	•	•	•		1,0	80		
	1875	•	•	•		1,5	120		
	2500	•	•	•		2,0	160		
	3125	•	•	•		2,5	200		
	3750	•	•	•		3,0	240		
VCB FISH	937	•	•	•		0,7	60		
	1250	•	•	•		1,0	80		
	1875	•	•	•		1,5	120		
	2500	•	•	•		2,0	160		
	3125	•	•	•		2,5	200		
	3750	•	•	•		3,0	240		
SELF FISH	937	•	•	•		0,7	60		
	1250	•	•	•		1,0	80		
	1875	•	•	•		1,5	120		
	2500	•	•	•		2,0	160		
	3125	•	•	•		2,5	200		
	3750	•	•	•		3,0	240		
VCA BT	1250	•	•	•	-18°C / -25°C	1,0	320		
	1875	•	•	•		1,6	480		
	2500	•	•	-		2,0	640		
VCA TCBM	937	•	•	-	+65°C	0,8	80		
	1250	•	•	-		1,0			
VCB TCBM	937	•	•	-		0,8			
	1250	•	•	-		1,0			
VCA TCPW	937	•	•	-		0,8			
	1250	•	•	-		1,0			
VCB TCPW	937	•	•	-		0,8			
	1250	•	•	-		1,0			
H125	1250	•	•	•		0°C / +2°C +2°C / +4°C	1,55	420	
	2500	•	•	•			3,10	840	
	3750	•	•	•			4,65	1260	
H150	1250	•	•	•			2,17	550	
	2500	•	•	•	4,34		1100		
	3750	•	•	•	6,51		1650		

Venezia 2	Lunghezza senza spalle Length without ends Länge ohne Seiten Longeur sans joues Longitud sin laterales Длина без боковин	Modello Model Modell Modele Modelo Модель			Temperatura di esercizio Working temperature Betriebstemperatur Temp. de fonctionnement Temperatura de trabajo Рабочая температура	Superficie di esposizione orizzontale Horizontal display surface Gesamte Ausstellungsfläche Surface d'exposition horizontale Superficie de exposición de apoyo Горизонтальная площадь экспозиции	Volume netto Net volume Nutzleistung Capacité utile Capacidad útil Полезный объем	
		REMOTO REMOTE		+ UCE WITH UNIT			vetrina display surface	cella storage
		carenato closed	con zamponi on feet	carenato closed				
		mm					°C	m ²
VDA con riserva with storage	1250	•	•	•	0°C / +2°C +2°C / +4°C	1,1	143	131
	1875	•	•	•		1,6	214	197
	2500	•	•	•		2,2	286	263
	3750	•	•	•		3,3	428	394
VDB con riserva with storage	1250	•	•	•		1,1	143	131
	1875	•	•	•		1,6	214	197
	2500	•	•	•		2,2	286	263
	3750	•	•	•		3,3	428	394
VDB SELF con riserva with storage	1250	•	•	•		1,1	143	131
	1875	•	•	•		1,6	214	197
	2500	•	•	•		2,2	286	263
	3750	•	•	•		3,3	428	394
VDA MAXI	1250	•	•	•		1,1	283	
	1875	•	•	•		1,6	425	
	2500	•	•	•		2,2	567	
	3750	•	•	•		3,3	850	
VDB MAXI	1250	•	•	•	1,1	283		
	1875	•	•	•	1,6	425		
	2500	•	•	•	2,2	567		
	3750	•	•	•	3,3	850		
VDA FISH	937	•	•	•	+2°C / +4°C	0,7	60	
	1250	•	•	•		1,0	80	
	1875	•	•	•		1,5	120	
	2500	•	•	•		2,0	160	
	3125	•	•	•		2,5	200	
	3750	•	•	•		3,0	240	
VDB FISH	937	•	•	•		0,7	60	
	1250	•	•	•		1,0	80	
	1875	•	•	•		1,5	120	
	2500	•	•	•		2,0	160	
	3125	•	•	•		2,5	200	
	3750	•	•	•		3,0	240	
VDB SELF FISH	937	•	•	•		0,7	60	
	1250	•	•	•		1,0	80	
	1875	•	•	•		1,5	120	
	2500	•	•	•		2,0	160	
	3125	•	•	•		2,5	200	
	3750	•	•	•		3,0	240	
VDA BT	1250	•	•	•	-18°C / -25°C	1,0	320	
	1875	•	•	•		1,6	480	
	2500	•	•	-		2,0	640	
VDA TCBM	937	•	•	-	+65°C	0,8	80	
	1250	•	•	-		1,0		
VDB TCBM	937	•	•	-		0,8		
	1250	•	•	-		1,0		
VDA TCPW	937	•	•	-		0,8		
	1250	•	•	-		1,0		
VDB TCPW	937	•	•	-		0,8		
	1250	•	•	-		1,0		
H125 VD	1250	•	•	•	0°C / +2°C +2°C / +4°C	1,55	420	
	2500	•	•	•		3,10	840	
	3750	•	•	•		4,65	1260	
H150 VD	1250	•	•	•		2,17	550	
	2500	•	•	•		4,34	1100	
	3750	•	•	•		6,51	1650	

• DISPONIBILE - AVAILABLE

- NON DISPONIBILE - NOT AVAILABLE

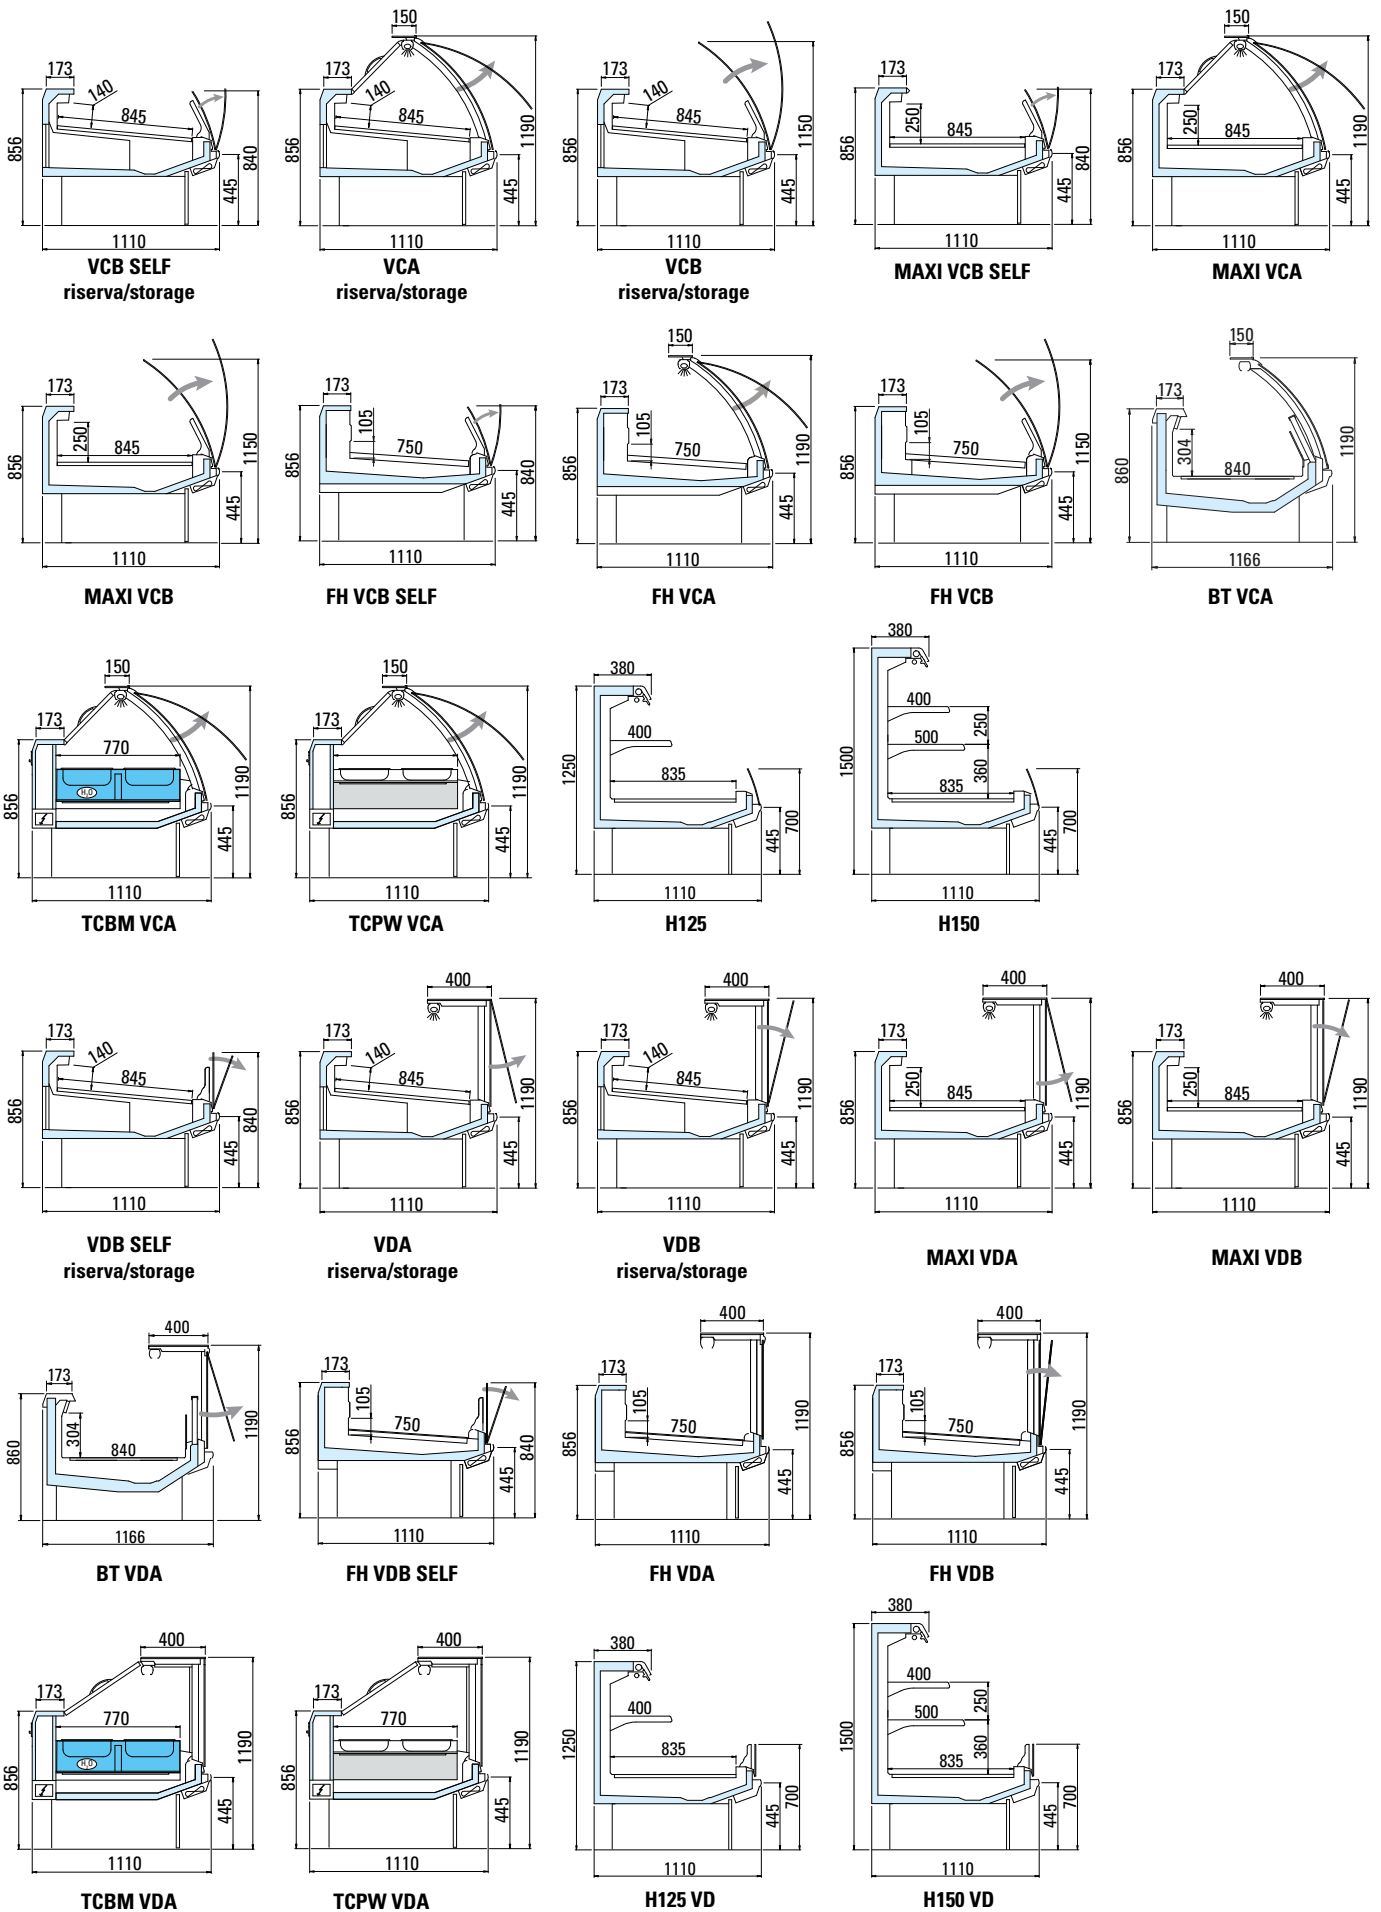

ARNEG S.p.A. - Via Venezia, 58 - 35010 Campo San Martino (PD) Italy - Tel. +39 049 9699333 - Fax +39 049 9699444 - RAEE IT801000000139
 Certified ISO 9001:2008 - ISO 14001:2004 - ISO 50001:2011 - B50HSAS 18001:2007
 Contenuto modificabile senza preavviso. Content can be changed without notice. Inhalt Veränderbar ohne Vorankündigung. Contenu modifiable sans préavis. Contenido modificable sin previo aviso. Содержание изменяется без предупреждения